


## DS-D5055UL-B 54.6" 4K Monitor



### Key Features

- Industrial grade A+ LCD panel
- Designed for surveillance, high reliability and stability
- Abundant varieties of interfaces: BNC, VGA, digital interface and diversified interfaces
- 4K resolution is 4 times 1080P can own broader view and more abundant details
- 16.7 million color, display picture perfectly
- Support horizontal and vertical display
- Horizontal 178°, Vertical 178°
- Dedicated project RS232 interface
- Build-in loudspeaker, audio visual connection
- VESA standard
- Metal shell

### Interfaces

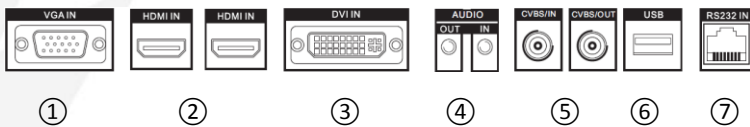

NO.	Description
1	VGA IN
2	HDMI IN
3	DVI IN
4	AUDIO IN/OUT
5	CVBS IN/OUT
6	USB Interface
7	RS-232 IN

### Model



DS-D5055UL-B




# Specifications

<b>Model</b>	DS-D5055UL-B			
<b>Backlight</b>	LED Backlight			
<b>Screen Size</b>	54.6"			
<b>Pixel Pitch</b>	0.315 mm * 0.315 mm			
<b>Max Resolution</b>	3840 × 2160			
<b>Brightness</b>	500 cd/m <sup>2</sup> (Typical)			
<b>Contrast</b>	1100 : 1			
<b>Response Time</b>	8 ms			
<b>Color</b>	10 bit, 1.07B			
<b>Active Area</b>	1233.4 × 706.8 mm			
<b>Viewing Angle</b>	Horizontal 178°, Vertical 178°			
<b>Interfaces</b>	HDMI input	2	Audio input	1
	VGA input	1	Audio output	1
	DVI input	1	USB interface	1
	CVBS(BNC) input	1	Network	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
	CVBS(BNC) output	1	RS-232 interface	1
<b>Power Supply</b>	AC 100~240V, 50/60 Hz			
<b>Power Consumption</b>	≤ 100W			
<b>Standby Power Consumption</b>	< 1 W(Standby)			
<b>Loudspeaker</b>	5W x 2			
<b>Working Temperature</b>	0 °C ~ 40 °C(32°F ~ 104°F)			
<b>Working Humidity</b>	10% ~ 90% (No Condensation)			
<b>Storage Temperature</b>	-20°C ~ 60°C(-4°F ~ 140°F)			
<b>Storage Humidity</b>	5%~90% (No Condensation)			
<b>Color of Casing</b>	Black			
<b>VESA</b>	4-M6 200 mm * 300 mm			
<b>Dimensions(W*H*D)</b>	1262.1 mm(W)*742.9 mm(H)*55.7 mm(D)			
<b>Packing Dimensions(W*H*D)</b>	1395 mm * 295 mm * 890 mm			
<b>Gross Weight</b>	41 kg			
<b>Net Weight</b>	35 kg			
<b>Accessories</b>	Power cord	1		
	User manual	1		
	Warranty card	1		
	Remote control	1		
	CD	1		
	Battery	2		
<b>Bracket</b>	Pedestal	Optional	DS-DM5501B	
	Wall mounted	Optional	DS-DM4255W	
<b>*Note</b>	All specifications mentioned above are subject to the actual product			

## Dimensions (unit: mm)

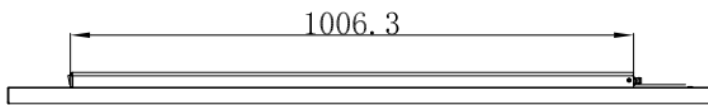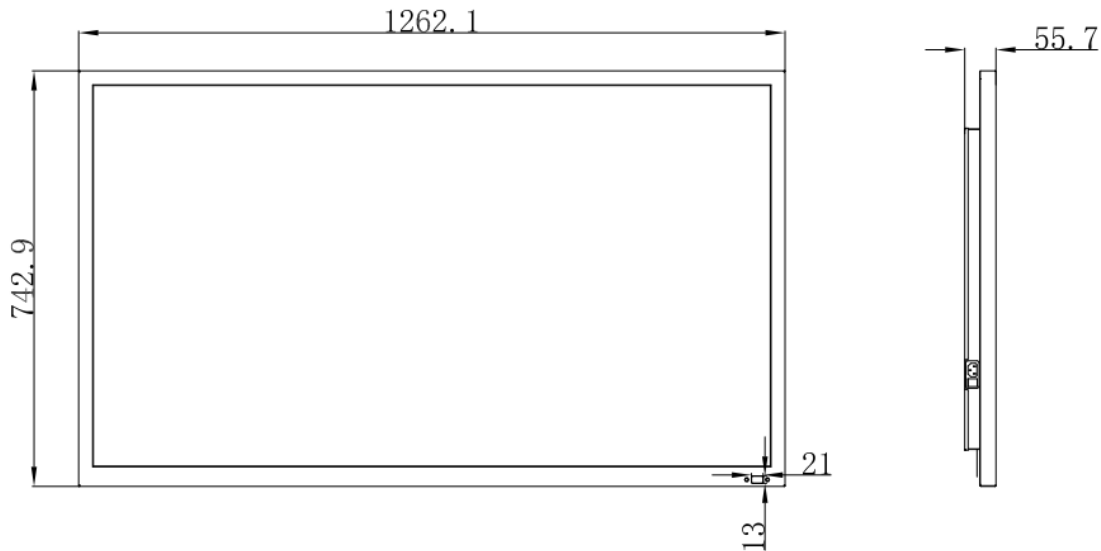

Distributed by

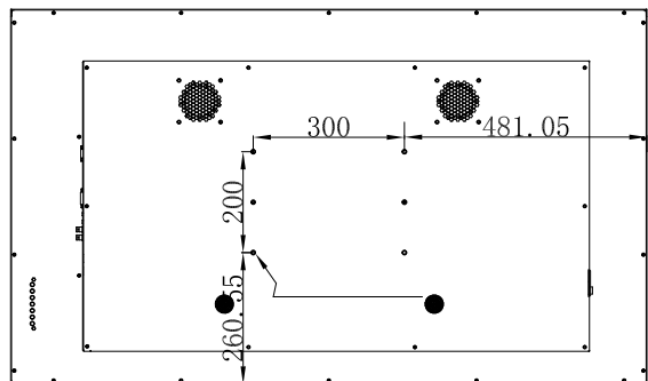

**HIKVISION**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Africa**  
T +27 (0) 0351172  
sale.africa@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761